



OS Series Coalescer/ Separator Cartridges

for Aviation & Diesel Fuels

Designed for superior performance in VF-61 & VF-609 Housings,
Facet's VFCS-21 & VFCS-22 Filter/Separator Vessels &
Racor's FBO-10 & FBO-14 Housings

FEATURES

- Can be used with pre-mixed fuel containing anti-icing additive
- One piece replacement combination coalescer and separator cartridge
- Laboratory tested to 0.2% water in incoming fuel, less-than 10 ppm in effluent
- Teflon® Coated Screen Separator
- Reliable radial sump seal design
- Easy installation
- Nominal 1/2 micron particle efficiency for Jet Fuel and-Avgas; 5 micron for Diesel Fuel
- Minimum 75 psid collapse strength
- Flow direction – outside to inside
- Operating temperatures up to 240°F (115°C)
- 5 - 9 operating pH range

The OS Series combination coalescer/separator cartridges filter dirt and remove water from aviation and diesel fuels. They are designed to fit into VF-61 and VF-609 housings, Facet'S VFCS-21 and VFCS-22 filter/separator housings, and Racor'S FBO-10 and FBO-14 housings. Performance is improved due to Teflon® coated screen separators and reliable radial sump seals.



OS-51288 Cartridge




OS-60988 Cartridge

® Teflon is a registered trademark of E.I. du Pont de Nemours & Co., Inc.

DESCRIPTION

Flow is from outside to inside through the cartridge. Coalesced water is repelled by the separator and drops to the sump for daily draining. Clean, dry fuel exits the cartridge through the snout at the top.

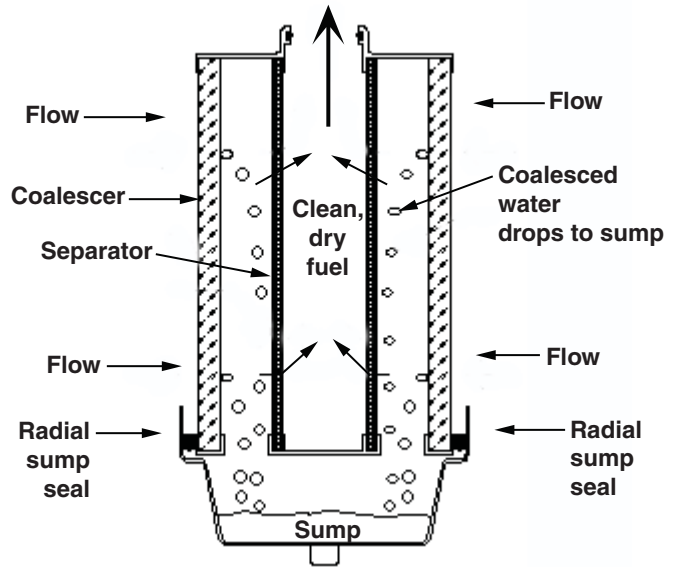


CARTRIDGE SELECTION TABLE

MODEL NUMBER	FOR PRODUCT	VESSEL MODEL NUMBER	FLOW RATE USGPM (maximum)	MICRON RATING (μ)	DIMENSIONS			
					OD		LENGTH	
					inches	mm	inches	mm
OS-51288	Jet Fuel/Avgas	VF-61	35/45	0.5	6	152	11¼	298
OS-60988	Jet Fuel/Avgas	VFCS-21 / VF-609	35/45	0.5	6	152	9	229
OS-61288	Jet Fuel/Avgas	VFCS-22	50/60	0.5	6	152	13	330
OS-51286	Diesel Fuel	VF-61	18	5	6	152	11¼	298
OS-60986	Diesel Fuel	VFCS-21 / VF-609	23	5	6	152	9	229
OS-61286	Diesel Fuel	VFCS-22	30	5	6	152	13	330

Replace the cartridge when the differential pressure exceeds 15 psi or after 1 year of service, whichever occurs first.

*Because of the limited sump space in these vessels, IT IS IMPERATIVE to drain the sump at EVERY FUELING. It is also important to recognize that these OS cartridges by themselves do not provide a water defense system. One water defense option is to use the Water Detection Probe, Velcon part number 125-Q.



Velcon products are sold and serviced by a world-wide representative network. To order, contact Headquarters or your LOCAL REPRESENTATIVE:

COMPANY HEADQUARTERS:
 Velcon Filters, Inc. 1210 Garden of the Gods Road
 Colorado Springs, CO 80907
 Phone: 1.800.531.0180
 Fax: 719.531.5690
 e-mail: vfsales@velcon.com
 www.velcon.com

MANUFACTURING PLANTS LOCATED AT:
 Colorado Springs, Colorado
 Sylacauga, Alabama

OVERSEAS AFFILIATES:
 Frankfurt/M., Germany & Singapore

**Liquid Filtration
 and Separation
 Specialists**